

6. OTHER TOOLS and EQUIPMENT


AUTOMOTIVE MAINTENANCE ACCESSORIES
LIGHTS



OTHER TOOLS and EQUIPMENT

6. OTHER TOOLS and EQUIPMENT

AUTOMOTIVE MAINTENANCE ACCESSORIES

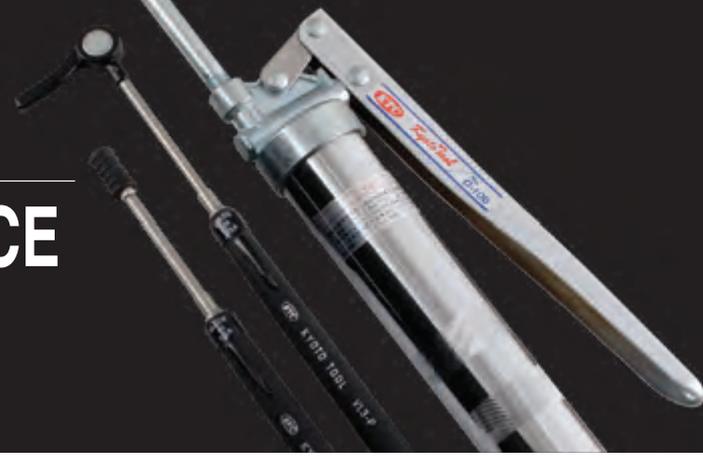


● GREASE GUN



GREASE GUN

No.	Capacity	Discharge per time (cc)	Max. Discharge Pressure (kg/cm ²)	Tube Dia.	L	ℓ	Nozzle No.	▼g	☐
G - 80	80	0.75	25	32	214	145	G-120NS	500	10
-100	100	0.75	25	38	238	175	G-190NC	600	10
-200	200	1.27	25	48	330	138		900	10
-300	300	1.23	25	48	320	235		930	10
-500	500	1.00	25	62	340	265		1200	10

• Can be used in narrow space.



● GREASE GUN (Cartridge Type)




GREASE GUN

No.	Capacity	Discharge per time (cc)	Max. Discharge Pressure (kg/cm ²)	Tube Dia.	L	ℓ	Nozzle No.	▼g	☐
CG-400	400	1.45	25	56	360	290	G-250NS	1950	10

Characteristics

- Cartridge type for easy grease charging. For saving grease.
- Comes with 1 cartridge. (Chassis Grease No.1 400g)



● NOZZLE FOR GREASE GUN



NOZZLE FOR GREASE GUN

No.	Type	L	▼g	☐
G -120NS	Straight	120	30	1
-180NS	Straight	180	60	1
-250NS	Straight	250	200	1
-450NS	Straight	450	270	1
G -190NC	Chuck	163	100	1
G -330NH	Hydro-hose	337	140	10

Characteristics

- Exchangeable nozzles for multi purposes such as straight nozzles for pouring into the deep narrow space, freely twisting hydro-hose nozzles and chuck nozzles.

● PANTOGRAPH JACK



PANTOGRAPH JACK

No.	Capacity kg	Height		ℓ	L	W ₁	W ₂	Car Model	▼kg	☐
		Max.	Min.							
PJ-06	600	340	90	130	380	40	90	Mini cars & Mini trucks	1.8	10
-08	800	380	105	140	410	45	100	Passenger cars under 2,000cc	2.4	5
- 1	1000	415	115	150	440	45	120	Passenger cars over 2,000cc	3.7	5


Characteristics

- Trapezoidal thread made by roll forming applied in the screw part for precision and durability.
- Comes with handle.
- PJ-08 has a movable head.

Spare parts

No.	Pats name	Length	▼kg	☐
PJ-06-H	Handle	460	0.3	1

CAUTION • READ THE PROVIDED INSTRUCTION CAREFULLY BEFORE USE.
 • DO NOT USE FOR THE LOAD OVER THE SPECIFIED CAPACITY.
 • DO NOT PUT YOUR BODY OR ANY PART OF YOUR BODY SUCH AS HAND, FOOT, FINGER, ETC. BELOW THE CAR JACKED UP.

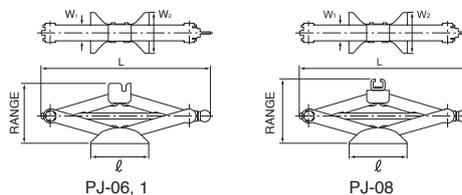


*Please check the merchandise inventory for a product that is marked by before placing an order.

MAGNETIC FINDER

No.	L	W	D	Attractive Force (Reference)	▼kg	☒
VK-300	720~1035	318	95	Approx. 400g	1.3	1
VK-400	720~1035	398	95	Approx. 600g	1.5	1

- It is a cleaning tool that collects the parts and scraps that are scattered on the floor or passage of factory, etc.
- Casters allow the smooth work.
- With the release function that releases the magnetic force by handle, collected chips and the like can be safely removed.
- Handle is telescopic that's convenient in storage.

● MAGNETIC FINDER

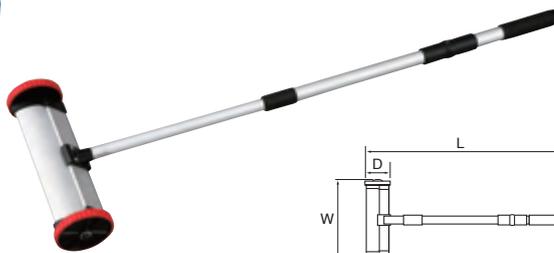

HAND PICKER


No.	L	▼g
VS4-3	512	170

Purpose


- A tool for picking up small objects fallen into narrow space you cannot reach or in liquid such as water.

Features

- Flexible rubber shaft you can bend in any way.
- Three claws easily catch resin, rubber, or aluminum objects which magnets cannot pick up.
- Large knob makes operation easy.



● HAND PICKER

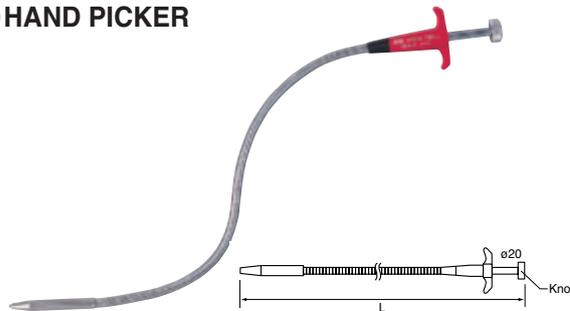

MAGNETIC PICK-UP TOOL


No.	L	Magnet Outer Diameter	Magnet holding capacity (g)	▼g	☒
VL2-HD	520	6.5	450	115	20

Special features

- Neodymium magnet applied for much stronger power for picking up.
- Magnetized flexible pick-up tool.
- Convenient for picking up articles dropped in narrow quarters, inside machines, liquids or chips in grooves or holes.

CAUTION • DO NOT USE WHERE ANY BAD EFFECT CAN BE CAUSED BY MAGNETISM.
• DO NOT USE IN VERY HOT PLACE.

● MAGNETIC PICK-UP TOOL (Powerful Type)

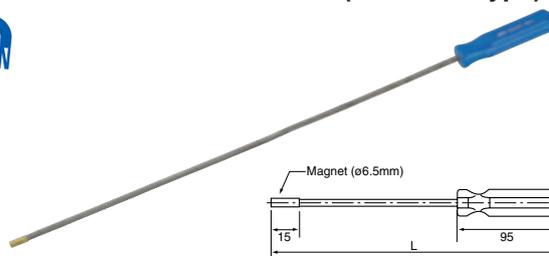

MAGNETIC PICK-UP TOOL

Telescopic Motion Shaft


No.	Tip	L	ℓ	Magnet Diameter	Magnet Hanging Power (kg)	▼g
VL3-1	Small	185~815	145	8	1.3	70
VL3-2	Medium	185~815	145	15.6	6.3	90
VL3-P	Hook Type	185~815	145	12.6	1.1	70

Special features

- 7-step shaft makes easy length adjustment.
- With a hook useful for storing in pockets.
- Energy ring reduces magnetism on the side, avoiding adherence to side objects in narrow space.

[Adoption of Energy Ring] (except VL3-P)

Side magnetism is reduced and catches the object quickly even in narrow and deep space.

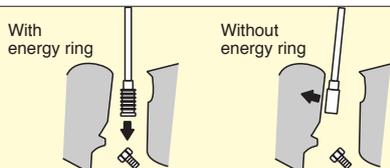

● MAGNETIC PICK-UP TOOL "Telescopic Motion Shaft"




MAGNETIC PICK-UP TOOL

Free Shaft


No.	Tip	L	ℓ	Magnet Diameter	Magnet Hanging Power (kg)	▼g
VL3F-1	Small	560	165	8	1.3	110
VL3F-2	Medium			15.6	6.3	130

Special features

- Free Shaft allows complicated moves.
- Magnet's direction can be determined from knob operation at grip end.
- The main body will be in a free state if you remove guiding shaft.
- Shaft section is coated with resin, making cleaning an easy job

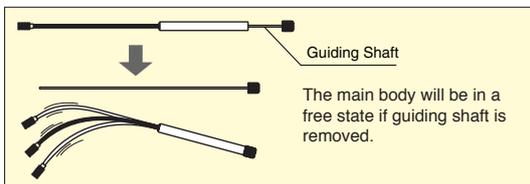

● MAGNETIC PICK-UP TOOL "Free Shaft"

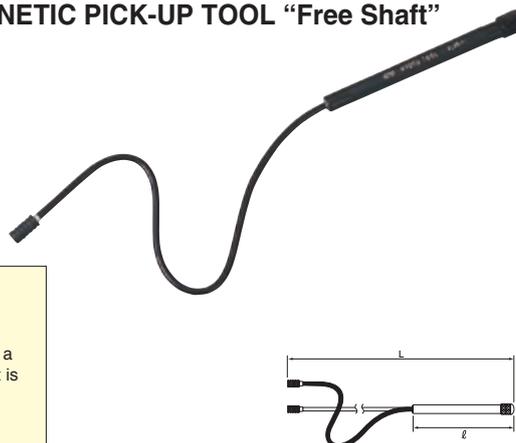

● CHECK MIRROR



CHECK MIRROR

No.	Mirror Size	L	ℓ	▽g
VS-2	Medium 44×66	190~870	145	70
VS-3	Large 56×92	200~890		80

- Purpose**
- For inspection side or back of engine room or engine auxiliaries.
- Features**
- Mirror section has an acrylic resin mirror which is difficult to break.
 - Ball joint enables wide range of angles (Fig.1).
 - Retention power is increased by fixing the ball joint with a bolt nut. (Fig.2)
 - 7-step shaft makes length adjustment easy.
 - For grip section a soft grip is employed. Easy to grip, hard to slip.


● MAG-MIRROR SET




MAG-MIRROR SET

No. VLS5	▽g 280
Telescopic movement shaft	Full length: 180~810
Magnet	Small Magnet diameter: 8
Magnet	Medium Magnet diameter: 15.6
Mirror	Size:44×66
Magnifier	Size:44×66

• wider range of application with change of attachments (4 pcs.) to meet your requirements.



● HANDY BAR

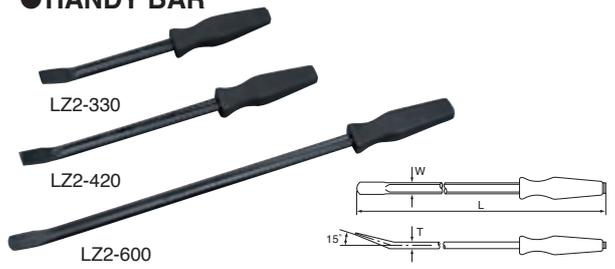


HANDY BAR

No.	Name	W	T	L	▽g	☞
LZ2-330	Handy Bar, Mini	19	10	330	530	5
-420	Handy Bar, Short	9	10	420	635	5
-600	Handy Bar, Long	19	10	600	800	5

- Purpose**
- Prying : For adjusting tension belts such as V-belt
 - Widening : For removing missons from engines
 - Drawing : For drawing drive shafts from missions (def)
- : For separating struts and lower arms
 - : For removing oil seals, gears, bearings, etc.


● ROLLING WEDGE BAR

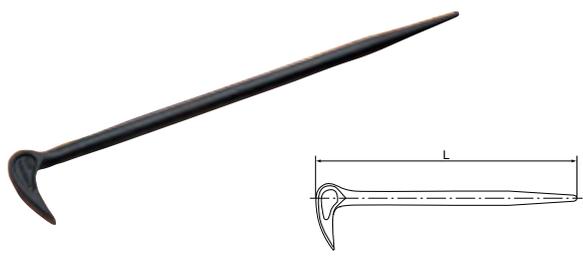

ROLLING WEDGE BAR

No.	Shank Dia.	L	▽g	☞
LZ1-450	ø16	410	685	1

• Convenient tool aligning, prying, widening, hitting, etc.

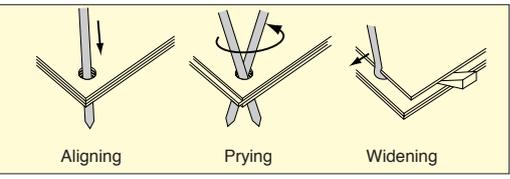


● SERVICE CREEPER



SERVICE CREEPER

No.	L	W	H	h	Special Features	▽kg	☞
AYSC-20F	1030	440	105	85	6 wheels type for superb operability Big sized head rest applied for easy operation	7.5	1
-20R	1030	440	125~240	90	Made of sponge Made of urethane with head rest	8.5	1

- All items have swivel castors for good movability.
- ⚠ CAUTION • DO NOT USE ANY CASTORS WHICH ARE WEARED, OLD OR CANNOT TURN SMOOTHLY
- DO NOT USE ON ANY SLOPE AND/OR ROUGH SURFACE.



*Castors are set as replacement parts.
Check with your dealer for details.

FENDER COVER

No.	Size	▼g	📦
AYC-2	400×1100	750	1

Features

- Built-in magnet rubber in 4 positions make attachment to fender easy.
- With folding (stitches) easy to set on the fender.
- Inside is made of soft cloth that does not hurt the body, while outer surface is soft vinyl leather which absorbs shock.
- Work on car suspension possible even when the cover is on. Long enough to cover long nose cars.

CAUTION

- DO NOT USE IN PLACES WHERE MAGNETISM MAY AFFECT ELECTRONIC PARTS, ETC.
- MAGNET RUBBER PART TENDS TO COLLECT STEEL POWDER. REMOVE THE POWDER BEFORE USE.

● FENDER COVER




FRONT COVER

No.	AYC-3	▼kg
		1.1

Application Features

- Compact cars and minivans of light (excluding 1Box and truck) or standard size.
- V-folded shape with surface fastener is used on the fender corner, precisely fitting light vehicles with the vehicle width adjusting mechanism. By expanding the folded part, it fits from compact cars to minivans.
- By adopting a slit on the license plate section, work from the service hole is possible while the front cover is attached. (Light vehicles)
- With an opening given on the hood lock part, the hood can be closed while the front cover is attached on the vehicle.
- Front fabric uses the material with excellent oil resistance that prevents oil or the like from seeping in, allowing it to be easily wiped with a rag or the like, and the back fabric uses a sponge material that is less likely to damage the body.



It can be expanded to be used for compact cars to minivans.

● FRONT COVER D.PAT.



COVERING SET

Covering Set

No.	ATYC4014	▼kg
		1.1

Seat Cover · Steering Cover · AYC401, AYC402,
Floor Mat Cover · Scuff Plate Cover AYC403, AYC404

Seat Cover D.PAT.

No.	AYC401	▼g
		450

Usage Application Features

- Prevents contamination on the seat in maintenance and inspection.
- Supports from light vehicles to standard-sized minivans.
- Wide design that supports bench seat in light vehicles.
- Opened shoulder part that supports the driver's seatbelt (convertibles) and passenger seatbelt (pillar-less).
- Shift prevention cushion prevents the cover from shifting and achieves comfortable work.



Headrest part securely fits the height of the headrest by the strap on the back.




Seatbelt can be inspected while the seat cover is attached.

● COVERING SET



AYC401




Shift Prevention Cushion

Steering Cover

No.	AYC402	▼g
		70

Usage Application Features


- Prevents contamination on the handle in maintenance and inspection.
- Supports from light vehicles to standard-sized minivans.
- Supports the steering of $\phi 36\sim 39$.
- * It may not be able to be attached depending on the handle shape.
- Opened handle center part that allows the easy maintenance and inspection of meters, etc.
- Fixed band is adopted which prevents slipping and shifting even when operating the handle left and right in looseness inspection.

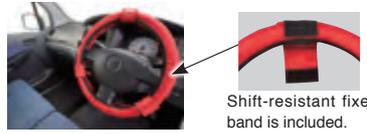

Shift-resistant fixed band is included.



AYC402



Applicable handle: $\phi 36\sim 39$

Floor Mat Cover


No.	AYC403	▼g
		230

Usage Application Features

- Prevents contamination on the floor mat in maintenance and inspection.
- Supports from light vehicles to standard-sized minivans.
- PVC that hardly slips even in working under rain is used on the front fabric and EVA that prevents slippage is used on the back fabric.
- It can be used repeatedly, reducing the cost compared to disposable type.



AYC403



Scuff Plate Cover

No.	AYC404	▼g
		290

Usage Application Features


- Prevents contamination on the scuff plate in maintenance and inspection.
- Prevents scratches on the scuff plate during the fault diagnosis that uses OBD.
- Supports from light vehicles to standard-sized minivans.
- PVC that hardly slips even in working under rain is used on the front fabric and EVA that prevents slippage is used on the back fabric.



Drop-prevention function (surface fastener) is adopted. Idea for the fault diagnosis that uses OBD.



AYC404



CAUTION Please do not drive or operate while this product group is equipped on the vehicle.

*Please check the merchandise inventory for a product that is marked by before placing an order.

● AIR BLOW GUN



AIR BLOW GUN

No.	Nozzle Length	Dia.	Material	Temp	L	▼g
YKAG-090A	90	0D ø6 1D ø4	Poliacetar Oxymethylene	- 40°C ~+60°C	254	145
-330A	320				492	180
-490A	490				666	210

*For YKAG-090 only, the nozzle has 30° angle.

Purpose

- Blowing off dusts, misture, etc.

Special Feature

- Made of POM plastic light body and lever.
- 3 sizes of bodies and 7 kinds of accessories for multi purposes.

■ Optional Accessories

No.	Name	Size	Purpose
YKAG-01	Chip Shield	ø100	Avoiding blow-back in operation.
-02	Rubber Chip	50	For use in painted sur. face and soft material
-03	Silencer	55	For minimizing noise under 79 dB.
-04	Ventury	55	For strong blowing off.
-05	Air Curtain	35	Preventing blow-back.
-06	Extension	385	For doing remotejob.
-07	By-pass	30	For using in lower pressure.

*For YKAG-090A only, the nozzle has 30° angle.

CAUTION • BE CAREFUL OF DUST WHICH MAY SCATTER.
• WEAR SAFETY GLASSES AND A MASK WHEN USING THE TOOL.

● COMPACT AIR BLOW GUN OPTIONAL NOZZLE



COMPACT AIR BLOW GUN OPTIONAL NOZZLE

No.	Product Name
YKAGC-S	Silencer nozzle
YKAGC-95	95mm tube nozzle
YKAGC-R	Rubber chip nozzle

● It is an optional part for compact air blow gun (YKAGC-102).


* Compact air blow gun (YKAGC-102) is discontinued.

 YKAGC-S Silencer nozzle It has the silencing effect of up to 79 db.	 YKAGC-95 95mm tube nozzle For the air blowing of dust, dirt and moisture found in normal work	 YKAGC-R Rubber chip nozzle For the blowing of painted surfaces and soft materials that does not damage around work
--	--	---

SAFETY GLASSES

No.	Type	Lens	Frame Color	Width×Max. Height	▼g	☞
YDA-360	1 Single lens	PET	Clear	150×56	52	10
-715	1 Single lens	PET-AF	Blur	140×56	39	10
-730	1 Single lens	PET-AF	Crystal Blue	160×64	43	10

- Can be fitted over prescription spectacles (YDA-360 only)
- Side length is adjustable (YDA-715, 221)
- To ensure comfortable operation, safety glasses have upper and side lenses to protect the worker's eyes from any flying debris.
- To ensure a comfortable fit and to prevent dust from getting in, the upper part of the safety glasses is made of elastomer cushion. This cushion will soften the shock if hit by flying debris. (YDA-715, 730)
- The lens can be adjusted for a perfect fit. (4 Levels, 38 Degrees) (YDA-715, 730)



Lens adjustment is possible (YDA-715, 730)

*YAMAMOTO is the registered trademark of the Yamamoto Kogaku Co., Ltd.

● SAFETY GLASSES



SAFETY GOGGLE

No.	Lens	Frame Color	Frame Material	Width×Max. Height	▼g	☞
YDB-530	Acety, Mistless, PET-AF	Clear	Flexible vinyl	150×56	85	10

- Can be fitted over prescription spectacles
- Can be used together with a mask
- The strap turns at the frame, preventing twist.
- Can also be fitted while wearing a safety helmet.

● SAFETY GOGGLES



*YAMAMOTO is the registered trademark of the Yamamoto Kogaku Co., Ltd.

MAGNETIC PARTS TRAY

No.	Material	Thickness (mm)	Size	▼g	☞
YKPT-RM	SUS430	0.5	∅150×41	370	1
-SM	SUS430	0.5	240×140×42	700	1
-MM	SUS430	0.6	358×158×42	1080	1
-LM	SUS430	0.6	294×275×42	1430	1

- Made of stainless steel tray for strong rust resistance.
 - Rubber mounted magnet holds in 1,000 gauss magnetizing power.
- ⚠ CAUTION • DO NOT USE IN PLACES WHERE MAGNETISM MAY CAUSE TROUBLES.

● MAGNETIC PARTS TRAY



YKPT-LM

STAINLESS PARTS TRAY

No.	Material	Thickness (mm)	Size	▼g	☞
YKPT-20	SUS304	0.5	200×120×45	160	1
YKPT-22	SUS304	0.5	220×132×46	185	1
YKPT-24	SUS304	0.5	240×144×48	225	1
YKPT-26	SUS304	0.5	260×156×50	260	1
YKPT-28	SUS304	0.5	280×168×50	290	1
YKPT-30	SUS304	0.5	300×180×55	350	1
YKPT-33	SUS304	0.5	330×198×57	400	1
YKPT-36	SUS304	0.5	360×216×60	465	1
YKPT-40	SUS304	0.6	400×240×66	740	1
YKPT-44	SUS304	0.6	440×264×71	840	1
YKPT-48	SUS304	0.6	480×288×77	980	1
YKPT-52	SUS304	0.6	520×312×82	1200	1

(Optional) Special Partition Plate for Parts Tray (YKPT-20)

No.	Material	Thickness (mm)	Size	▼g	☞
YKPT-20S	SUS304	1.0	180×100×20	70	1

- Efficiency of disassembly work improved by keeping parts in good order.
- Purpose**
- For temporarily placing parts of disassembled automobiles, motorcycles, or machines.
- Features**
- Various sizes of tray help you put disassembled parts in good order.
 - Trays can be stacked for storage.
 - Made of durable stainless steel.

● STAINLESS PARTS TRAY



*Please check the merchandise inventory for a product that is marked by before placing an order.

● PARTS TRAY SET

STAINLESS PARTS TRAY SET



No. TYKPT4A ▼kg 1.7
1 each of YKPT-20, 26, 33, 40 and partitioning plate for 20.



No. TYKPT5A ▼kg 1.7
YKPT-20 (2), 24 (2), 40 (1), and partitioning plates (2) for 20.



No. TYKPT4B ▼kg 1.9
1 each of YKPT-24, 30, 36, and 44

● PARTS TRAY SET



Can be stored by stacking

PARTS TRAY SET

No. TYKPT5	▼kg 9.6	📦 1
Parts Tray	YKPT-51L, 59L, 51H, 59H (1pcs. each)	
Parts Tray (Punching Metal Type)	YKPT-51P (1pcs.)	

- It can be stacked and stored to save the space.
- Seamless one-piece draw forming eliminates the concern for liquid such as water and oil to leak.
- Rust is prevented by the use of galvanized plate. (YKPT-51P is uni-chrome plated)
- YKPT-51P is a punching metal type.


● PARTS TRAY




PARTS TRAY

No.	W	D	H	Capacity (ℓ)	▼kg	Material
YKPT-51L	510	320	45	5	1.3	Galvanized Sheet Iron
YKPT-59L	595	360	45	6	1.8	Galvanized Sheet Iron
YKPT-51H	510	320	120	14	2.0	Galvanized Sheet Iron
YKPT-59H	595	360	115	17.5	2.7	Galvanized Sheet Iron
YKPT-51P	510	320	120	Punching Metal Type	1.8	Galvanized Sheet Iron

- It can be stacked and stored to save the space.
- Seamless one-piece draw forming eliminates the concern for liquid such as water and oil to leak.
- Rust is prevented by the use of galvanized plate. (YKPT-51P is uni-chrome plated)
- YKPT-51P is a punching metal type.

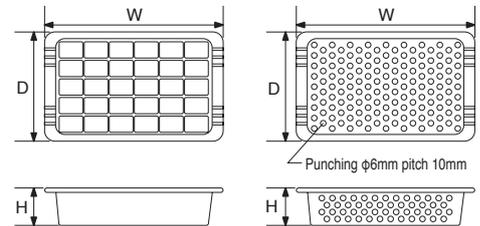

● ALUMINUM PARTS TRAY LARGE & SMALL

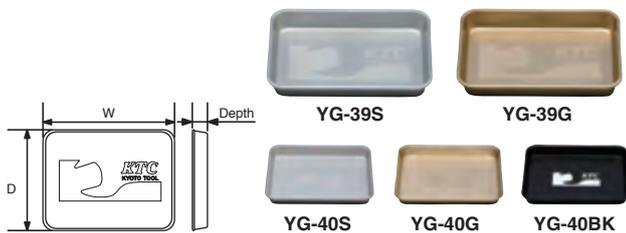

ALUMINUM PARTS TRAY

No.	W	D	Depth	Color	Material	📦
YG-40S	210	150	30	Silver	Aluminum	1
YG-40BK	210	150	30	Black	Aluminum	1
YG-40G	210	150	30	Golden	Aluminum	1
YG-39S	350	270	40	Silver	Aluminum	1
YG-39BK	350	270	40	Black	Aluminum	1
YG-39G	350	270	40	Golden	Aluminum	1

Aluminum tray. Our logo, with its wrench motif, is laser-engraved across it. Use it for holding parts removed from cars or motorcycles during maintenance, or for catching oil.


● ALUMINUM GARAGE TRAY



GARAGE TRAY

No.	W	D	Depth	Color	Material	▼kg	📦
YG-41S	695	395	10	Silver	Aluminum	1.6	1

Large aluminum maintenance tray. Use it for holding large parts or tools while you're giving your car or motorcycle the maintenance it deserves. Or place it under the vehicle to keep your floor free of oil stains. Aluminum alloy for excellent rust- and corrosion-resistance, weighing just 1.6 kg. Easy cleanup too.



6. OTHER TOOLS and EQUIPMENT

LIGHTS



CAUTION LED LIGHTS


- Do not look directly at LED.
- Do not use oxyride or secondary batteries (NiCd, NiMH).

- It does not have the waterproof or dustproof function. Do not use in water or rain.
- Do not disassemble or modify.

LED HAND LIGHT

No.	Color (Body)	Size (φ is head part)	Number of LED	Power consumption	▼g (Battery not included)	☒
AL805HB	Gunmetal gray	φ40×141	1	High 3W Low 1W	125	1

- Brightness is increased by 3W high-brightness LED equipped on the compact aluminum body. (Our conventional product comparison)
 - High (3W) and Low (1W) can be switched.
 - With an indicator that changes its color from green to red when the battery power is low.
 - With a convenient strap hole. (Strap is not attached)
- * Spare parts are configured. Please contact your dealer for details.



LED	3W×1pcs.
LED rated life	35,000 hours
Use battery	AAA batteries (1.5V) × 3
Continuous use time (Alkaline battery, at room temperature)	High approx. 1.5 hours Low approx. 3.0 hours
Available temperature range	-20~60°C
Available humidity range	85% or less

* Continuous use time is an estimate, which depends on the use condition.

LED HAND LIGHT



- It can switch between High (3W) and Low (1W)




* It is not covered for repair.

LED COMPACT LIGHT

No.	Color (Body)	Size (φ is head part)	Number of LED	Power consumption	▼g (Battery not included)	☒
AL805CA	Gunmetal gray	φ16×103	1	0.25W	23	1

- It can be used for a longer period of time (approx. 4 times our conventional product) by the increase in the LED light performance.
- New circuit that reduces the power consumption is equipped on the small aluminum body.
- It supports various work scenes with the use of clip, mountable clip and magnet.
- Flexible arm of the mountable clip can be rotated by 360° to fine-tune the angle.



LED	0.25W×1pcs.
LED rated life	40,000 hours
Use battery	AAA batteries (1.5V) × 1
Continuous use time (Alkaline battery, at room temperature)	Approx. 3.5 hours
Available temperature range	-20~60°C
Available humidity range	90% or less

* Continuous use time is an estimate, which depends on the use condition.

LED COMPACT LIGHT



Mountable clip



Magnet



Compact with clip. Can be inserted in a chest pocket.



Can be mounted on a hat, etc. with the mountable clip.



Can be pasted on various locations with the magnet.




Combined state

* It is not covered for repair.

LED FLEXIBLE LIGHT

No.	Color (Body)	Size (φ is head part)	Number of LED	Power consumption	▼g (Battery not included)	☒
AL805F	650	420	1	1.00W	125	1

- LED with higher directivity and brightness compared to the conventional LED is adopted.
- Body is made of lightweight and strong aluminum.



LED	1.00W×1pcs.
LED rated life	100,000 hours
Use battery	AA batteries (1.5V DC) × 3
Continuous use time (Alkaline battery, at room temperature)	Approx. 8 hours (at room temperature)
Available temperature range	-20~+60°C
Available humidity range	90%

LED FLEXIBLE LIGHT



* It is not covered for repair.




It also works as a hand light.

MAGNETIC HAND WITH LED LIGHT

No.	Total length	Flexible arm length	Number of LED	Power consumption	▼g (Battery not included)	☒
AL805MG	600	420	1	0.25W	96	1

- Strong magnet is built into the head.
- Body is made of lightweight and strong aluminum.



LED	0.25W×1pcs.
LED rated life	100,000 hours
Use battery	AA batteries (1.5V DC) × 2
Continuous use time (Alkaline battery, at room temperature)	Approx. 40 hours (at room temperature)
Available temperature range	-20~+60°C
Available humidity range	90%



MAGNETIC HAND WITH LED LIGHT




* It is not covered for repair.

*Please check the merchandise inventory for a product that is marked with ⚡ before placing an order.

● CORDLESS LED LIGHT (SLIM TYPE) D.PAT.P.

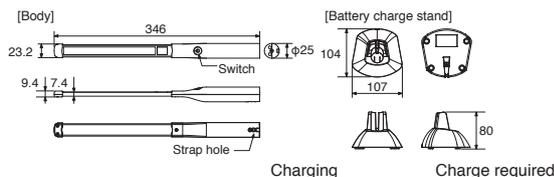

Thin and narrow slim body is adopted.



Battery indicator that can be read at a glance.



- CAUTION**
- Do not look directly at LED.
 - Do not equip anything other than the attached strap.
 - Do not use in water or rain.

CORDLESS LED LIGHT

No.	Number of LED	Available temperature range	Brightness (total flux)	Power consumption	Continuous use time	Charging time	▼g	☑
AL807	12	0~50°C	High 240lm Low 150lm	High 3.6W Low 1.9W	High approx. 2 hours Low approx. 4 hours	Approx. 2 hours	130	1

* Continuous use time is an estimate, which depends on the use condition.
* Charge time depends on the battery condition and charging environment.

- Attachment: Battery charge stand, AC adaptor, strap
- It is an indoor working light with slim body.
 - With thin, narrow and long slim body and cordless charging, work in tight and deep places such as engine room is possible.
 - With the adoption of 12 LED and diffusion plate, unpleasant shadow during work is reduced, making it easy on the eyes.
 - Long life is achieved by protecting the LED with heat sink.
 - Accidental fall is prevented with strap.
 - 2-stage brightness adjustment is possible with the switch.
 - Charging type and cordless, it can be maneuvered in tight places.
 - Balanced body shape with weight on the grip.

■ Supply parts

No.	Product Name
AL807-S	Battery Charge Stand
AL807-A	AC Adaptor
AL807-P	Strap

■ AC Adaptor

Input Voltage	AC100V
Input Frequency	50~60Hz
Output Voltage	DC5.5V
Output Current	2.5A
Maximum Power	13.75W
Cord Length	1.2m




Accidental fall is prevented with the strap.



Can be charged with the strap attached.

* It is not covered for repair.

● LED LIGHT D.PAT.P.

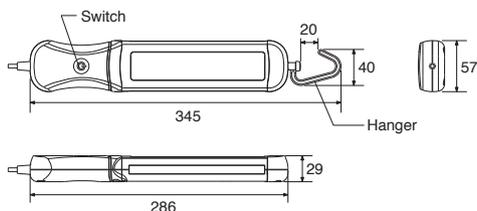

Hanger can become a stand.



Power cord holder for extension cord connection is attached.



- CAUTION**
- Do not look directly at LED.
 - Do not use in water or rain.

LED LIGHT

No.	Number of LED	Available temperature range	Cord length	Brightness (total flux)	Power consumption	▼g	☑
AL806	12	0~50°C	5m	440lm	8W	400	1
AL806S	12	0~50°C	0.5m	440lm	8W	300	1

Attachment: Hanger · mounting screws, AC adaptor, power cord holder

- Indoor working light with bright and wide light that's easy on the eyes.
- With the adoption of 12 LED and diffusion plate, unpleasant shadow is reduced, brightly illuminating the work area.
- Long life is achieved by protecting the LED with heat sink.
- 4-stage brightness adjustment is possible with the switch.
- Suspension angle can be adjusted by the hanger mounting position.
- Body is drip-proof and AC100V power dedicated.

■ Supply parts


No.	Product Name
AL806-1	Hanger · mounting screws
AL806-2	AC Adaptor
AL806-3	Power cord holder

■ AC Adaptor

Input Voltage	AC100V
Input Frequency	50~60Hz
Output Voltage	DC24V
Output Current	0.5A
Maximum Power	12W



Short cord type is available

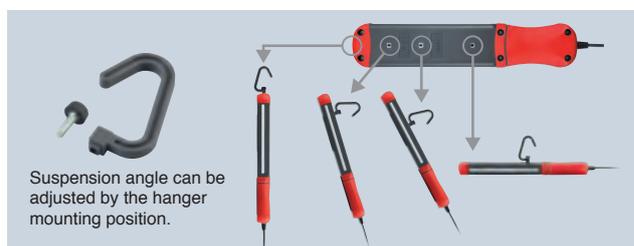

Suspension angle can be adjusted by the hanger mounting position.

Hanger can be fixed in top 8 directions and back 4 directions according to the work environment.